

Brisa[®] | Brisa[®] Distressed | Promessa[®]
Ultraleather[®] | Montage



stylex



About Ultrafabrics —

Our mission is to pioneer socially conscious materials without sacrificing on incomparable comfort and superior performance. For this reason, Ultrafabrics never compromises on quality, nor do we pause on innovation. We are committed to delivering maximum comfort, lasting durability, and increased sustainability in each and every fabric.


Benefits of Ultrafabrics —

- 100% polycarbonate construction*
- Superior durability – industry-leading 16 weeks hydrolysis results*
- Climate control technology resists temperature changes for seating comfort
- Does not contain Red List chemicals
- Withstands commonly used cleaners, disinfectants, and 1:5 bleach/water solution
- SCS Indoor Advantage Gold certified* and REACH compliant

*does not apply to Montage



Brisa
Click for full collection

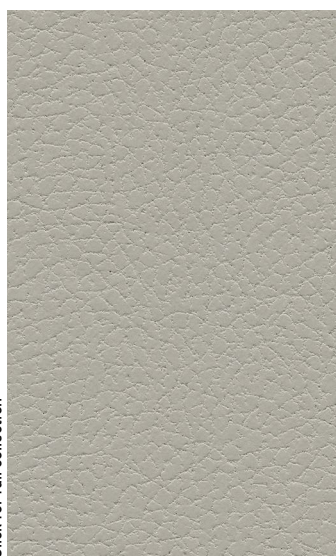

BRO 3276




BRO 3822



BRO 3864




BRO 8269



BRO 4303



BRO 5820



BRO 6528




BRO 3915




BRO 3051




BRO 3823




BRO 2645



BRO 2694



BRO 5360



BRO 3022




BRO 3591



BRO 1361



BRO 2620



BRO 2683



BRO 5749

Benefits of Brisa & Brisa Distressed —

- Backcloth contains recycled polyester and FSC/PEFC certified rayon. Each linear yard contains 8.3 recycled plastic bottles.
- Breathable technology promotes airflow for ultimate seating comfort
- Softly textured aesthetic
- 300,000 double rubs (Wyzenbeek)
- Acoustical properties



Brisa Distressed
Click for full collection



BRD 3480




BRD 3340



BRD 3980




BRD 3271




BRD 3871



BRD 3976




BRD 5679



BRD 3870




BRD 3974



BRD 5773



Promessa
Click for full collection

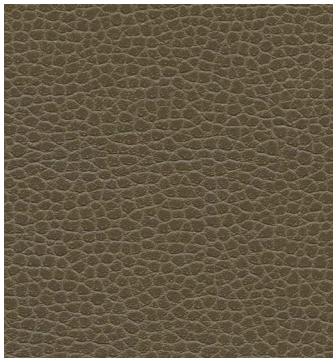


PR 3462



PR 3786




PR 3145



PR 2604




PR 1387




PR 2695



PR 2680




PR 5354



PR 5011

Ultraleather
Click for full collection

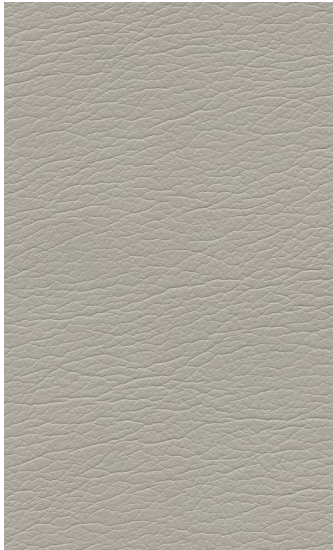

ULO 5676



ULO 5684



ULO 3287



ULO 5806



ULO 8272




ULO 3778



ULO 3612



ULO 2508



ULO 2685



ULO 7234



ULO 5666



ULO 5040



ULO 5607



Benefits of Promessa —


- Backcloth contains recycled polyester and FSC/PEFC certified rayon. Each linear yard contains 8.3 recycled plastic bottles.
- Pebbled texture with subtle sheen
- 400,000 double rubs (Wyzenbeek)

Benefits of Ultraleather —

- Backcloth contains 100% FSC/PEFC certified rayon
- Natural grain appearance
- 400,000 double rubs (Wyzenbeek)

Benefits of Montage —

- Crafted in North America
- Soft, rich, and weathered texture
- 200,000 double rubs (Wyzenbeek)

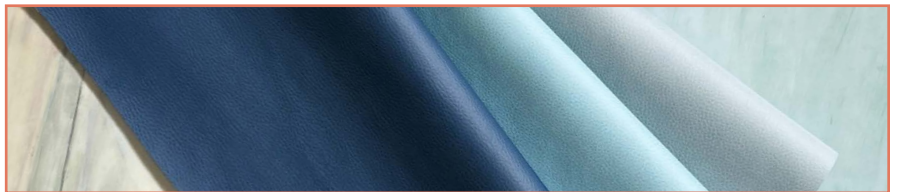

Montage
Click for full collection



USM 35733



USM 56303



USM 50393



USM 35593



USM 53483




USM 35673




USM 35573




USM 35553



USM 43243



USM 27863



USM 72313



USM 60873



USM 60883

Collection	Composition	Weight / Thickness	Repeat	Abrasion	Air Permeability / Sound Absorption
Brisa & Brisa Distressed Acoustics Breathable Comfort Recycled Bottles & Renewable Fibers	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% FSC/PEFC Certified Rayon Backing	8.9 oz. per sq. yard / Approx. 0.95 mm	8"V x 10"H Brisa Distressed	ASTM D4157 300,000 DR Wyzenbeek	ASTM D737 / ASTM C423
Promessa Recycled Bottles & Renewable Fibers	100% Polycarbonate Polyurethane Surface 65% Recycled Polyester, 35% FSC/PEFC Certified Rayon Backing	11.5 oz. per sq. yard / Approx. 1.1 mm	N/A	ASTM D4157 400,000 DR Wyzenbeek	N/A
Ultraleather Renewable Fibers	100% Polycarbonate Polyurethane Surface 100% FSC/PEFC Certified Rayon Backing	9.7 oz. per sq. yard / Approx. 0.95 mm	N/A	ASTM D4157 400,000 DR Wyzenbeek	N/A
Uf Select					
Montage	Polycarbonate Blended Surface 65% Polyester, 35% Cotton	12.5 oz. per sq. yard / Approx. 0.95 mm	N/A	ASTM D4157 200,000 DR Wyzenbeek	N/A
Width:	54"				
Hydrolysis:	16 Weeks (10 weeks Montage) ASTM D3690 SECT. 6.11 (Hydrolytic Stability) / ISO 1419 Method C (Accelerated Ageing)				
F/R Rating:	ASTM E84 (adhered) - Class A CA TB 117 - Pass FMVSS 302 - Pass NFPA 260 - Class 1 UFAC - Class 1 AB 2998		Can be treated to meet FR specifications. These fabrics, when treated and/ or used with other compatible furniture components, have been shown to perform under the fire test conditions of ASTM E84 (unadhered), BS 5852 Source 0, 1 & 5 (Cig, Match and Crib 5), IMO FTPC Part 8, and BS EN 1021 Parts 1 & 2.		
Adhesion of Coating:	ASTM D751				
Tear Strength:	ASTM D2261				
Breaking Strength:	ASTM D751				
Tensile Strength:	BS EN ISO 1421				
Colorfastness to Crocking:	AATCC 8, Grade 4-5 Wet & Dry				
Colorfastness to Light:	AATCC 16.3, 200 Hours, Grade 4 ISO 105 B02, Grade 6				

*Removal of most denim dye may vary depending on the quality of dye and the period of time the stain sets in. Dye transfer is difficult to control, not always preventable, and may be irreversible.

Ultrafabrics' collections meet or exceed ACT Voluntary Performance Guidelines.

For more information on certifications and standards, sustainability, as well as cleaning and care instructions, click here to visit our website.