STYLEX

Disassembly and Recycling Document

Disassembly Time: 10min / No Special Training Required

Model: Ridge with swivel base *Refer to P.2 for model variations


Tools Required safety glasses phillips screwdriver 11/32 wrench 1/2 wrench






Breakdown Steps


- 1. Turn the chair on its back to reveal the steel swivel base. Start by using a phillips head screw driver to remove the glides, use a 11/32 sized wrench to hold the nuts in place while you unscrew the screws (figure A1).
- 3. Rotate the metal base to reveal the screws holding the swivel to the chair. Maneuver your screw driver through the openings to access the screws and remove the swivel from the chair frame (figure B1).
- 3. After removing the swivel from the chair, use a phillips head screw driver to unscrew the screws holding the round metal base onto the swivel. Use a 1/2 sized wrench to hold the nuts in place so you can remove screws (figure C1).
- Finally remove the rubber bumpers with your phillips head screwdriver (figure D1).










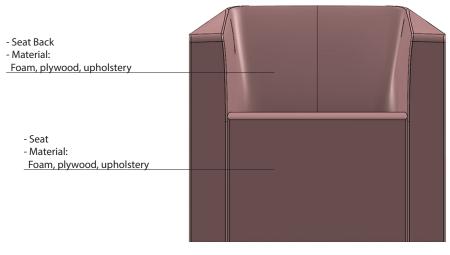

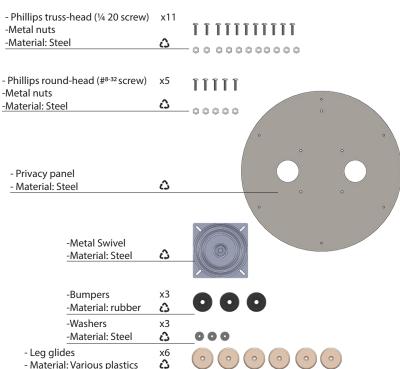

STYLEXModels: Ridge lounge

Disassembly and Recycling Document Disassembly Time:10min / No Special Training Required

Chair Variations
Ridge
The Ridge lounge is available in three sizes:
Single Seat (A1)
Love Seat (A2)
Two Seat Sofa (A3)
Three Seat Sofa (A4)

All sizes are available with standard glides. The single seat is also available with a swivel base (disassembly on P1).

To Disassemble all other models, place the lounge on its back and locate the glides located under each arm. Using a phillips head screw driver remove each glide.

Materials and Processes Wood frame assembled with metal hardware.





