


Disassembly & Recycling Manual




Part Key

Part	Qty	Material
A Table Top	1	Solid Wood
B Mounting Plate	1	Steel
C Column	1	Steel Nylon
D Base Attachment	1	Aluminum

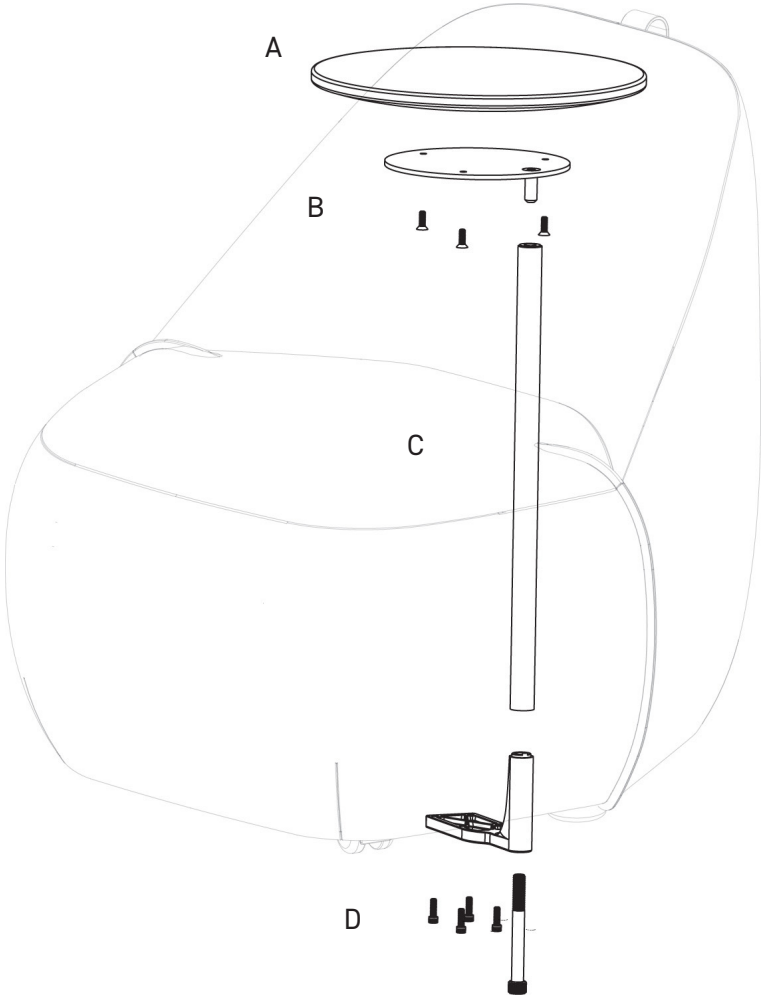

Hardware Key

Part	Qty	Material
H1 Phillips flat head screw*	3	Steel
H2 Steel socket head bolt 4.5"	1	Steel
H3 Steel socket head screw .75"	4	Steel

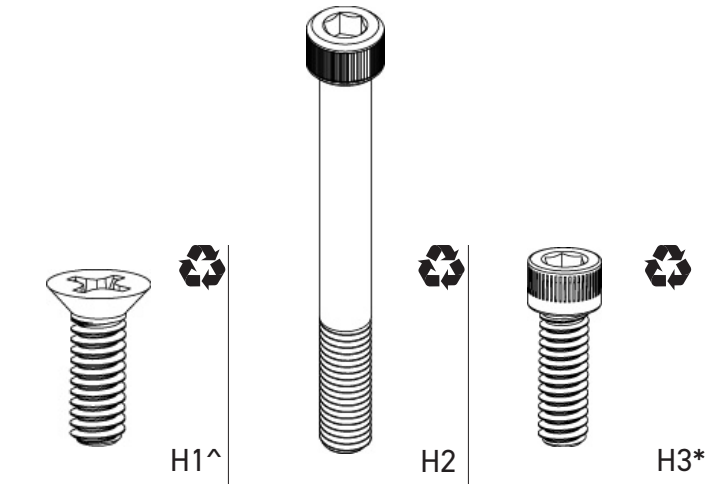

Removal | Dissassembly

A. To remove the top (A), unscrew the 3 phillips flathead screws from the mounting plate (B). Using a mallet, tap upward from underneath the mounting plate to remove it from the column (C).

B. Remove the column from the base attachment (D) using a 3/8 allen wrench turning counter clock wise to loosen the large socket head bolt. Use a 5/32 allen wrench to loosen the smaller socket screws to remove the base attachment from the chair body.

